

SELF POWERED ROLL CLAMP ROTATOR MODEL RCR20

**CLAMPS AND ROTATES ROLL MATERIALS 360 DEGREES
QUICKLY ATTACHES TO ANY ITA CLASS II CARRIAGE
ON LIFT TRUCKS OR WALKIE STACKERS**





FEATURES:

- Completely self-contained power with no hydraulic or electrical connections required.
- Clamp & rotation functions mounted in control box with magnetic backing on coil cord to lift truck with safety clamp & unclamp features to eliminate accidental slippage.
- Control box cord equipped with quick disconnect
- Adjustable rotation speed and clamping pressure with variable flow and pressure regulators.
- 360-degree continuous rotation, left or right.
- Mounts on any ITA Class II carriage of lift truck, walkie stacker or straddle stacker.
- Quick and simple 2 bolt removal from lift truck without any hydraulic or electrical connections.
- Positive locking gearbox to prevent drifting.

SPECIFICATIONS:

- Maximum load capacity: 2,200 lb./ 1000 kg.
- Handle roll diameters if measured through the core from 18" / 457 mm to 42" / 1067 mm
- Rotation: 360 degrees, continuous
- Rubber faced clamping pads: 16" / 406 mm in overall height.
- Battery pack and internal automatic charger included in power compartment
- Dimensions: Maximum Width: 47" / 1194mm
Maximum Length: 48" / 1219mm
- Attachment Weight: 825 lb.
- Finish: Powder Coat Safety Yellow
- Optional: Small roll adapter insert for precise positioning of smaller diameters rolls

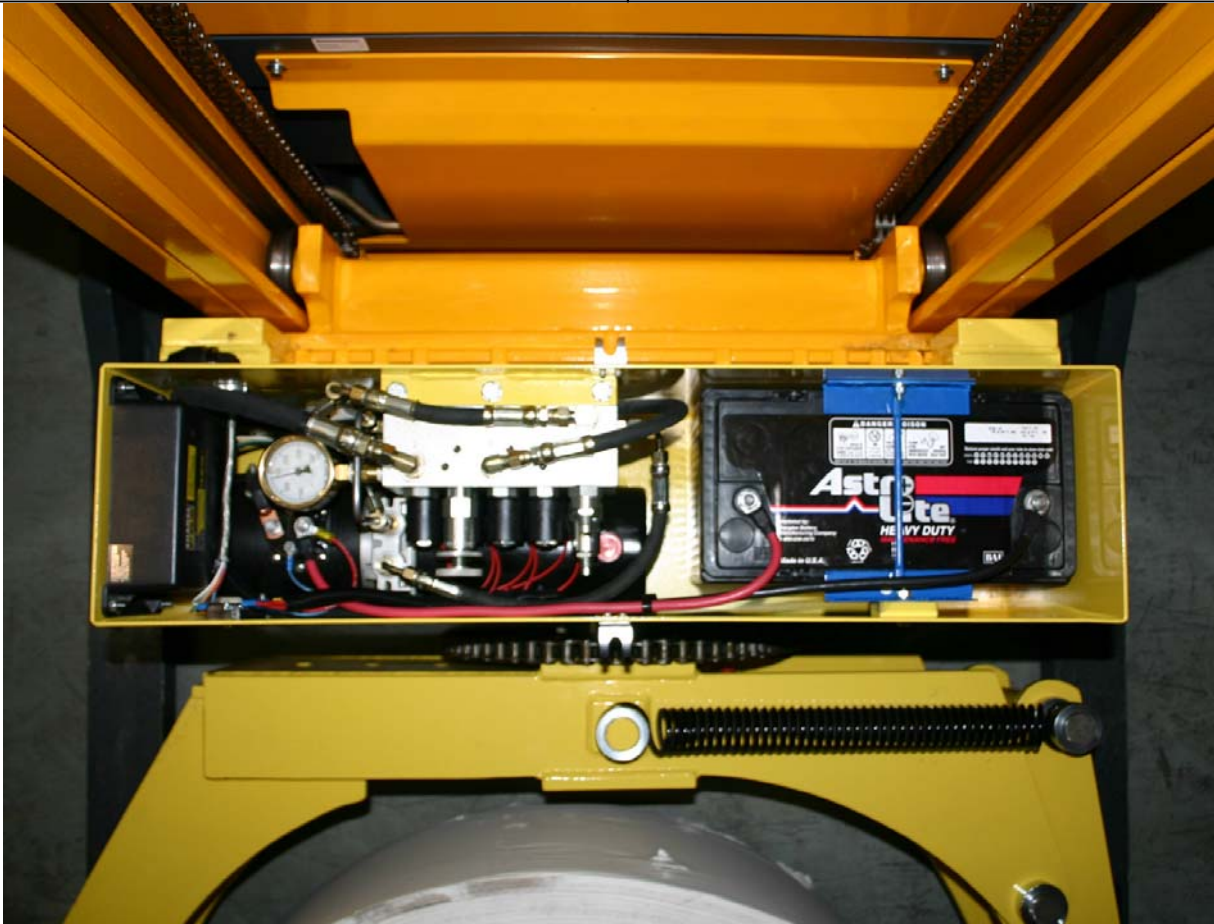

Easy Lift Equipment, Inc.
2 Mill Park Ct.
Newark, DE. 19713
800-233-1800 or 302-737-7000
Fax: 302-737-7333
Email: sales@easylifteqpt.com
www.easyliftequipment.com

Distributed by: