

**Easy Lift  
Equipment Co., Inc.**

2 Mill Park Court, Newark, Delaware 19713  
Phone: 800-233-1800 / 302-737-7000



# **EAGLE-GRIP® ATTACHMENTS**

**FOR HANDLING AND WEIGHING DRUMS**

# EAGLE-GRIP® ATTACHMENTS (EG)

## Contents

<b>Eagle-Grip® 1 Series Attachments</b> .....	<b>3-5</b>
EG1 Series Info .....	3
EG1 Spark Resistant Clamp & Quick-Claw Options.....	4
EG1 “Grip & Weigh” Attachments & Carriage Mount Models .....	5
<b>Eagle-Grip® 2L Series Attachments</b> .....	<b>6-9</b>
EG2L Series Info.....	6
EG2L Fiber Drum Guards & Spark Resistant Clamp Option.....	7
EG2L Articulating Heads.....	8
EG2L Quick-Claw, “Grip & Weigh” Attachments & Carriage Mount Models .....	9
<b>Eagle-Grip® 3 Series Attachments</b> .....	<b>10-13</b>
EG3 Series Info .....	10
EG3 Spark Resistant Clamp.....	11
EG3 Quick-Claw & Narrow Fork Frames .....	12
EG3 “Grip & Weigh” Attachments, Carriage Mount Models & Adjustable Frame info .....	13
<b>Eagle-Grip® 4 Series Attachments</b> .....	<b>14-17</b>
EG4 Series Info .....	14
EG4 Spark Resistant Clamp.....	15
EG4 Articulating Heads, Quick-Claw, Narrow Fork Frames .....	16
EG4 “Grip & Weigh” Attachments, Carriage Mount Models & Adjustable Frame info .....	17
<b>Mauser Heads for Eagle-Grip® 3 &amp; 4 Series Attachments</b> .....	<b>17</b>
<b>Eagle-Grip® Attachment Restraint Systems</b> .....	<b>18</b>
<b>Eagle-Grip® Attachment Preventative Maintenance Kits</b> .....	<b>18</b>
<b>Eagle-Grip® Magnetic Empty Drum Handling Attachment (EG4M8DC2-F)</b> .....	<b>19</b>
<b>Eagle-Grip® Powered Drum Dumper Attachment (EG2000RCR &amp; EG2000RCR-QC)</b> ...	<b>20-21</b>
<b>Eagle-Grip® EL4 Four Drum Handling Attachments</b> .....	<b>22-23</b>
EL4F Lift Truck Attachment.....	22-23
EL4C Crane and Overhead Hoist Attachment .....	23
<b>Eagle-Poly (EPG) and Eagle-Talon (ETG) Attachments</b> .....	<b>24</b>
<b>Eagle-Grip® Attachments Specifications</b> .....	<b>25-26</b>

**EASY LIFT EQUIPMENT., INC. IS AN  
ISO 9001: 2015 CERTIFIED COMPANY**



Easy Lift Equipment, Inc.  
2 Mill Park Ct.  
Newark, DE. 19713  
800-233-1800  
or 302-737-7000  
Fax: 302-737-7333  
Email: [sales@easylifteqpt.com](mailto:sales@easylifteqpt.com)  
[www.easylifteqpt.com](http://www.easylifteqpt.com)



**ISO 9001: 2015 Certified Company**

## EAGLE-GRIP® ATTACHMENTS (EG)

Eagle-Grip® attachments are the safest, most durable, quality-built lift truck attachments available for handling drums. Eagle-Grip® attachments are completely mechanical, requiring no electrical or hydraulic connections to the lift truck. Easy Lift Equipment's products are manufactured, powder coated for durability, and fully assembled in Newark, DE implementing the highest quality control standards in the industry. Most Eagle-Grip® Attachments are available on a free 30-day trial for in-plant evaluation and backed by a one-year parts & labor warranty; EG4M8DC2-F and EG2000RCR models, are available on a 30-day trial toward purchase program for first time buyers at 15% of the purchase price.

**EAGLE-GRIP® 1 SERIES ATTACHMENTS** Light-Duty Single Clamping Mechanism is capable of handling 750 lb. capacity per drum. The EG1 Series lift truck attachments utilize an Eagle-Grip® light-duty single automatic clamping mechanism designed for handling one or two drums at a time with a lift truck. All EG1 fork mounted models are knockdown units which bolt together but are shipped assembled and ready to use. EG1 fork mounted models provide easy installation by the operator within seconds either to or from a fork truck. EG1 models come standard with 33-inch long, light duty fork pockets designed to sit on the front of standard forks. A rubber belt cradle is optional on any EG1 model but is standard on any non-sparking model.

**EG1SCM-F  
Single Drum  
Attachment**



**EG1SCM2-F  
Double Drum  
Attachment**



### EG1SCM GRIPPING A STEEL, PLASTIC & FIBER DRUM



**EG1SCM-F w/ Steel Drum**



**EG1SCM-F w/ Plastic Drum**



**EG1SCM-F w/ Fiber Drum**

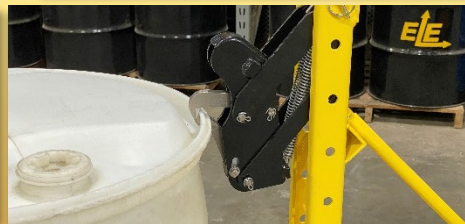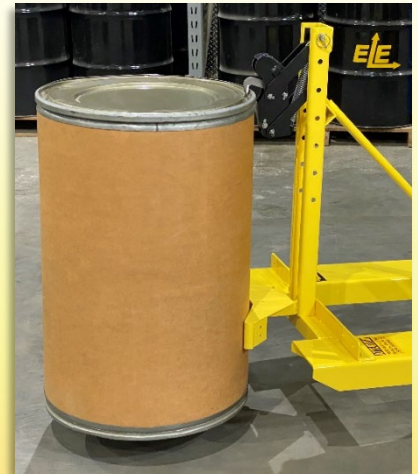

## EAGLE-GRIP® 1 SERIES ATTACHMENTS (CONT.)

**SPARK RESISTANT CLAMP OPTION** (also known as **SRC**) includes an outer housing constructed of stainless-steel along with stainless-steel clamping jaws. The SRC Clamp functions the same as the standard powder coated clamp but is better suited for working with flammable materials in potentially hazardous environments. The SRC option comes standard with the optional Rubber Belt(s) which rest against the lower side of the drum during transport and helps reduce the possibility of cosmetic damage or denting to the drum while being handled.

**EG1SCMSRC2-F**  
**Double Drum Attachment w/ SRC**

**EG1SCMSRC2-F**  
**Close-up of Clamping Heads**



**QUICK-CLAW** option for Eagle-Grip® 1 Series Attachments. The Quick-Claw option eliminates the need for a safety chain as well as prevents the operator from having to dismount and re-board the lift truck to connect and disconnect a safety chain during on-and-off usage. This is an ideal feature when attachment usage is intermittent over time. Quick-Claw models come standard with 43-inch-long fork pockets.

**EG1SCM-FQC**  
**Single Drum Attachment w/ Quick-Claw**

**EG1SCMSRC2-FQC**  
**Double Drum Attachment w/ Quick-Claw & SRC**



## EAGLE-GRIP® 1 SERIES ATTACHMENTS (CONT.)

**SCALE “GRIP & WEIGH” EG1 ATTACHMENTS** instantly verify the weight of a drum of incoming raw material while in the process of unloading. These attachments can also provide quick and easy weight confirmation of any outgoing drum contents, which can drastically reduce the time required to inventory weights of partially filled drums. EG1 models are recommended for lighter duty applications. All Grip & Weigh models are available with label printers (excluding intrinsically safe models). Note: The models seen below also include the Quick-Claw or Spark Resistant Clamp Options.

**EG1SCM-S-FQC**  
Single Drum Attachment w/ Scale  
& Quick-Claw Options



**EG1SCMSRC-F-S**  
Single Drum Attachment w/ Scale & Spark  
Resistant Clamp Options



**EG1 CARRIAGE MOUNT MODEL** is designed to fit directly onto the Class II carriage of any lift truck or stacker. These models secure directly to the carriage and do not require a fork mounted frame. This model is known as **EG1SCM-CM**.



Easy Lift Equipment, Inc.  
2 Mill Park Ct.  
Newark, DE. 19713  
800-233-1800  
or 302-737-7000  
Fax: 302-737-7333  
Email: [sales@easylifteqpt.com](mailto:sales@easylifteqpt.com)  
[www.easylifteqpt.com](http://www.easylifteqpt.com)

**EASY LIFT EQUIPMENT., INC.**

**ISO 9001: 2015**

**CERTIFIED COMPANY**

ISO 9001: 2015 Certified Company



**30-day free trial available for all EG1 models.**

## EAGLE-GRIP® 2L SERIES ATTACHMENTS

**EAGLE-GRIP® 2L SERIES ATTACHMENTS** Light-Duty Double Clamping Mechanism is capable of handling up to 1,000 lbs. on the single drum handling attachment and up to 1,500 lbs. on the double drum handling attachment. The EG2L Series lift truck attachments utilize an Eagle-Grip® light-duty double automatic clamping mechanism designed for handling one or two steel, plastic or fiber chimed drums at a time with a lift truck. The double clamping mechanism is ideal for working with open top drums as well as plastic or fiber drums over 600lbs. All EG2L fork mounted models are knockdown units which bolt together but are shipped assembled and ready to use. The Eagle-Grip® 2L double articulating heads are user friendly in that they allow the EG2Ls to pick and place drums even when misaligned or slightly separated up to 9” apart. EG2L fork mounted models provide easy installation of the frame either to or from a fork truck within seconds by the operator. EG2L models come standard with 33-inch long, light duty fork pockets designed to sit on the front of standard forks.

**EG2LDCM-F**  
**Single Drum Attachment**



**EG2LDCM2-F**  
**Double Drum Attachment**



**Close-up of EG2LDCM2-F Clamping Heads**



**Close-up of Rubber Belt Cradles**




Rubber belt cradles are included on all EG2L models and rest against the lower side of the drum during transport and helps reduce the possibility of cosmetic damage or denting to the drum while being handled.

## EAGLE-GRIP® 2L SERIES ATTACHMENTS (CONT.)

**FIBER DRUM GUARD** of the EG2L clamping heads are ideal when handling fiber drums. The fiber drum guards, when in the forward, locked position, are designed to help prevent the lower clamping jaw from damaging the fiber portion of the drum and help assist in ensuring that the clamp *only* activates on the metal chime of the drum.

**EG2L Clamp with Fiber Drum Guard engaged**

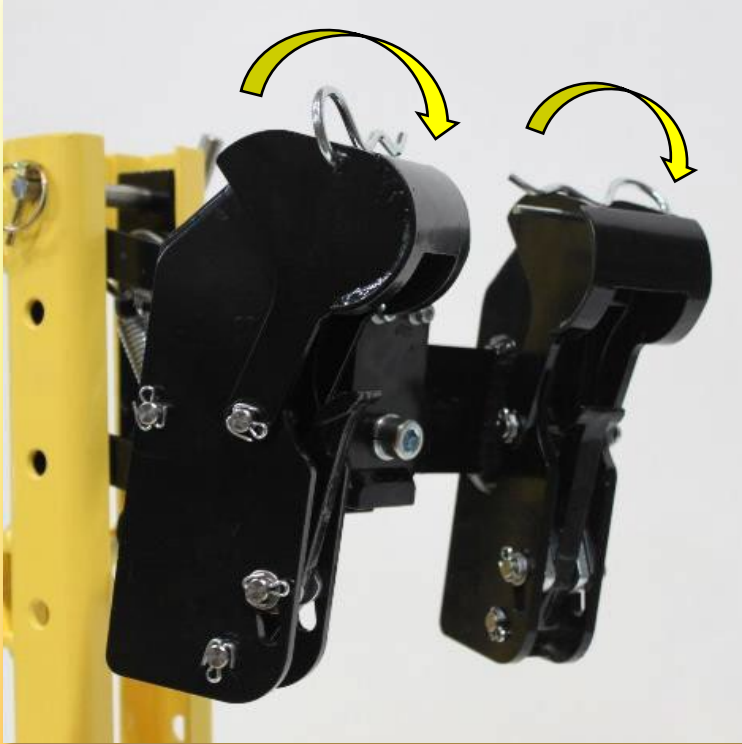

**EG2LDCM gripping a Fiber Drum**



**SPARK RESISTANT CLAMP OPTION** (also known as **SRC**) include outer housings constructed of stainless-steel along with stainless-steel clamping jaws. The SRC Clamp functions the same as the standard powder coated clamp but is better suited for working with flammable materials in potentially hazardous environments. The EG2L SRC option (just as with the powder coated EG2L) comes standard with Rubber Belt(s), which rest against the lower side of the drum(s) during transport and helps reduce the possibility of cosmetic damage or denting to the drum(s) while handling.

**EG2LDCMSRC2-F**  
**Double Drum Attachment w/ SRC**



**EG2LDCMSRC2-F**  
**Close-up of EG2LSRC Clamping Heads**



## EAGLE-GRIP® 2L SERIES ATTACHMENTS (CONT.)

### EG2LDCM GRIPPING A STEEL, PLASTIC & FIBER DRUM

EG2LDCM-F w/ Steel Drum




EG2LDCM-F w/ Plastic Drum



EG2LDCM-F w/ Fiber Drum



**EG2L ARTICULATING HEADS WITH '2-F' MODELS.** The Eagle-Grip® 2L double articulating heads are user friendly in that they allow the EG2Ls to grip and pick drums even when misaligned or slightly separated by up to 9" apart.

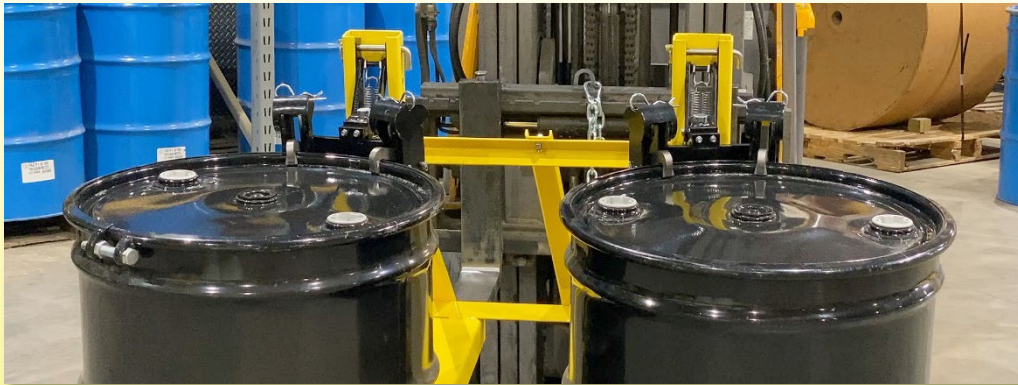

## EAGLE-GRIP® 2L SERIES ATTACHMENTS (CONT.)

**QUICK-CLAW** option for Eagle-Grip® 2L Series Attachments. The Quick-Claw option eliminates the need for a safety chain as well as prevents the operator from having to dismount and re-board the lift truck to connect and disconnect a safety chain during on-and-off usage. This is an ideal feature when attachment usage is intermittent over time. Quick-Claw models come standard with 43-inch-long fork pockets.

### EG2LDCM-FQC

#### Single Drum Attachment w/ Quick-Claw



### EG2LDCMSRC2-FQC


#### Double Drum Attachment w/ Quick-Claw & SRC



**SCALE “GRIP & WEIGH” EG2L ATTACHMENTS** instantly verify the weight of a drum of incoming raw material while in the process of unloading. These attachments also provide quick and easy weight confirmation of any outgoing drum contents as well, which drastically reduces the time required to inventory weights of partially filled drums. All Grip & Weigh models are available with label printers (excluding intrinsically safe models).

### EG2LDCM-F-S

#### Single Drum Attachment w/ Scale

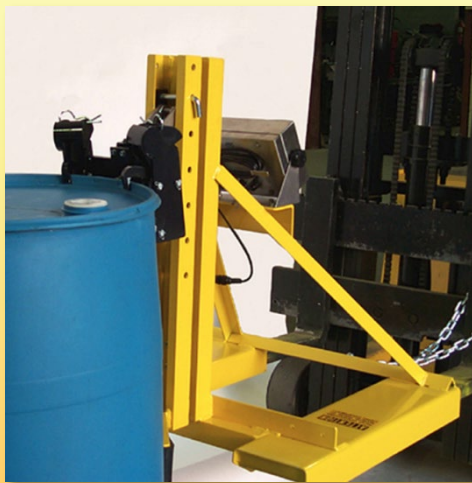

### EG2LDCM-F-S

#### Single Drum Attachment w/ Scale



**EG2L CARRIAGE MOUNT MODELS** are designed to fit directly onto the Class II carriage of any lift truck or stacker. These models secure directly to the carriage and do not require a fork mounted frame. This model is known as **EG2LDCM-CM**.



**30-day free trial available for all EG2 models.**

## EAGLE-GRIP® 3 SERIES ATTACHMENTS

**EAGLE-GRIP® 3 SERIES ATTACHMENTS** utilize heavy-duty single automatic clamping mechanisms for handling a wide range of steel, plastic, or fiber drums in high volume applications. Each EG3 single clamping mechanism can handle up to 1,500 lbs. per clamp. EG3 fork mounted models provide easy installation of the frame either to or from a fork truck within seconds by the operator. All EG3 attachments are provided with a heavy rubber belt to rest against the lower side of the drum. The belt helps reduce the possibility of cosmetic damage or denting to the drum while handling. EG3 models are provided with totally enclosed 43" fork pockets for use with lift trucks equipped with 42" forks. Standard fork pocket size for EG3 models are 7" Wide x 2.75" High x 43" Long. 49-inch Fork Pockets are available for 48-inch forks. In addition, specific custom sized fork pockets are available for all Eagle-Grip attachments.

**EG3SCM-F**  
**Single Drum Attachment**



**EG3SCM2-F**  
**Double Drum Attachment**



**Close-up of EG3SCM2-F Clamping Heads**



**EG3SCM2-F without Drums**



Rubber belt cradles are included on all EG3 models and rest against the lower side of the drum during transport and helps reduce the possibility of cosmetic damage or denting to the drum while being handled.

## EAGLE-GRIP® 3 SERIES ATTACHMENTS (CONT.)

**SPARK RESISTANT CLAMP OPTION** (also known as **SRC**) includes an outer housing constructed of stainless-steel along with stainless-steel clamping jaws. The SRC Clamp functions the same as the standard powder coated clamp but is better suited for working with flammable materials in potentially hazardous environments. The EG3 SRC option (just as with the powder coated EG3) comes standard with Rubber Belt(s), which rest against the lower side of the drum(s) during transport and helps reduce the possibility of cosmetic damage or denting to the drum(s) while handling.


**EG3SCMSRC2-F**

**Double Drum Attachment w/ SRC**



**EG3SCMSRC2-F**

**Close-up of Clamping Heads**

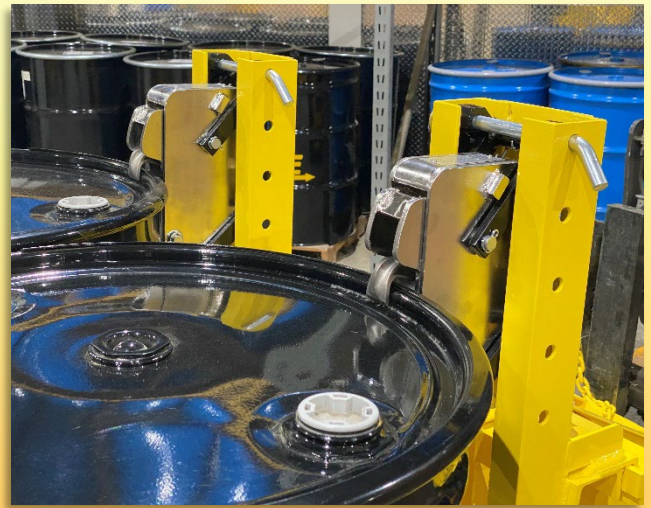

**EG3SCM GRIPPING A STEEL, PLASTIC & FIBER DRUM**


**EG3SCM-F w/ Steel Drum**



**EG3SCM-F w/ Plastic Drum**



**EG3SCM-F w/ Fiber Drum**

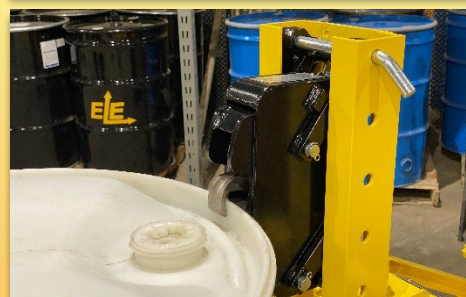

## EAGLE-GRIP® 3 SERIES ATTACHMENTS (CONT.)

**QUICK-CLAW** option for Eagle-Grip® 3 Series Attachments. The Quick-Claw option eliminates the need for a safety chain as well as prevents the operator from having to dismount and re-board the lift truck to connect and disconnect a safety chain during on-and-off usage. This is an ideal feature when attachment usage is intermittent over time. Quick-Claw models come standard with 43-inch-long fork pockets.


### EG3SCM2-FQC

#### Double Drum Attachment w/ Quick-Claw



### Quick-Claw Safety Restraint System

#### Close-up of forks in fork pockets

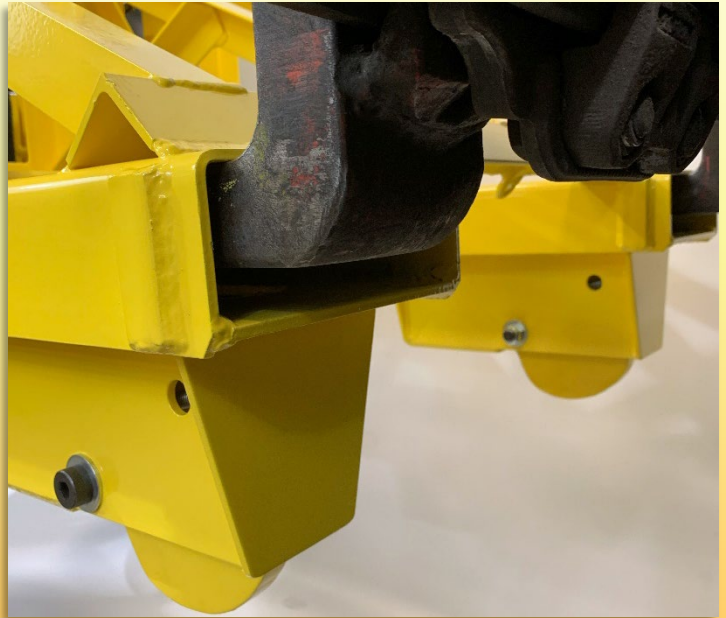

**NARROW FORK FRAMES** are available for situations when handling one drum at a time in tightly nested areas or racks is required, or for order picking drums in congested areas. The Narrow Fork Frame, with a 24" overall width, also allows the operator to pick and place a drum on the far side of a pallet, even in a congested rack. The Narrow Fork Frame is also available with the Quick-Claw option.

### EG3SCM-NF Narrow Fork Frame placing a drum in a rack



### EG3SCM-NF Narrow Fork Frame gripping a drum



## EAGLE-GRIP® 3 SERIES ATTACHMENTS (CONT.)

### SCALE “GRIP & WEIGH” EG3 ATTACHMENTS

instantly verify the weight of a drum (or drums) of incoming raw material while in the process of unloading. These attachments also provide quick and easy weight confirmation of any outgoing drum contents, which drastically reduces the time required to inventory weights of partially filled drums. All Grip & Weigh models are available with label printers (excluding intrinsically safe models).

#### EG3SCMSRC-NFQC-S

##### Single Drum Attachment w/ Scale and Quick-Claw



STEP TIERING DRUMS without pallets, using our Eagle-Grip® attachments, can save valuable warehouse space.

#### EG3SCMSCR2-F Step Tiering Drums



### EG3 CARRIAGE MOUNT MODELS

are designed to fit directly onto the Class II carriage of any lift truck or stacker. These models secure directly to the carriage and do not require a fork mounted frame. This model is known as EG3SCM-CM.



### ADJUSTABLE FRAMES of the Eagle-Grip® 3

Attachments can easily be converted between EG3SCM-F and EG3SCM2-F by adding or removing an EG3SCM-CM.



**30-day free trial available for all EG3 models.**

## EAGLE-GRIP® 4 SERIES ATTACHMENTS

**EAGLE-GRIP® 4 SERIES ATTACHMENTS** utilize heavy-duty double automatic clamping mechanisms for handling a wide range of steel, plastic, or fiber drums in high volume applications. Each EG4 double clamping mechanism can handle up to 2,000 lbs. per clamp. EG4 fork mounted models provide easy installation of the frame either to or from a fork truck within seconds by the operator. All EG4 attachments are provided with a heavy rubber belt to rest against the lower side of the drum. The belt reduces the possibility of cosmetic damage or denting to the drum while handling. EG4 models are provided with totally enclosed 43" fork pockets for use with lift trucks equipped with 42" forks. Standard fork pocket size for EG4 models are 7" Wide x 2.75" High x 43" Long. 49-inch Fork Pockets are available for 48-inch forks. In addition, specific custom sized fork pockets are available for all Eagle-Grip attachments.

**EG4DCM-F**  
Single Drum Attachment



**EG4DCM2-F**  
Double Drum Attachment



Close-up of EG4DCM gripping a steel drum



Model EG4DCM2-F with two drums



Rubber belt cradles are included on all EG4 models and rest against the lower side of the drum during transport and helps reduce the possibility of cosmetic damage or denting to the drum while being handled.

## EAGLE-GRIP® 4 SERIES ATTACHMENTS (CONT.)

**SPARK RESISTANT CLAMP OPTION** (also known as **SRC**) includes outer housings constructed of stainless-steel along with stainless-steel clamping jaws. The SRC Clamp functions the same as the standard powder coated clamp but is better suited for working with flammable materials in potentially hazardous environments. The EG4 SRC option (just as with the powder coated EG4) comes standard with Rubber Belt(s), which rest against the lower side of the drum(s) during transport and helps reduce the possibility of cosmetic damage or denting to the drum(s) while handling.

**EG4DCMSRC2-F**

**Double Drum Attachment w/ SRC**



**EG4DCMSRC2-F**

**Close-up of Clamping Heads**



### EG4DCM GRIPPING A STEEL, PLASTIC & FIBER DRUM

**EG4DCM-F w/ Steel Drum**



**EG4DCM-F w/ Plastic Drum**



**EG4DCM-F w/ Fiber Drum**



## EAGLE-GRIP® 4 SERIES ATTACHMENTS (CONT.)

**EG4 ARTICULATING HEADS WITH ‘2-F’ MODELS.** The Eagle-Grip® 4 double articulating heads are user friendly in that they allow the EG4s to pick and place drums even when misaligned or slightly separated up to 9” apart.



**QUICK-CLAW** option for Eagle-Grip® 4 Series Attachments. The Quick-Claw option eliminates the need for a safety chain as well as prevents the operator from having to dismount and re-board the lift truck to connect and disconnect a safety chain during on-and-off usage. This is an ideal feature when attachment usage is intermittent over time. Quick-Claw models come standard with 43-inch-long fork pockets.

**EG4DCM2-FQC**

**Double Drum Attachment w/ Quick-Claw**



**NARROW FORK FRAMES** are available for situations when handling one drum at a time in tightly nested areas or racks is required, or for order picking in congested areas. The Narrow Fork Frame, with a 24” overall width, also allows the operator to pick and place a drum on the far side of a pallet, even in a congested rack. The Narrow Fork Frame is also available with the Quick-Claw option.

**EG4DCM-NF Narrow Fork Frame**  
placing a drum in a rack



**EG4DCM-NF**  
Narrow Fork Frame



## EAGLE-GRIP® 4 SERIES ATTACHMENTS (CONT.)

**SCALE “GRIP & WEIGH” EG4 ATTACHMENTS** instantly verify the weight of a drum (or drums) of incoming raw material while in the process of unloading. These attachments also provide quick and easy weight confirmation of any outgoing drum contents, which drastically reduces the time required to inventory weights of partially filled drums. All Grip & Weigh models are available with label printers (excluding intrinsically safe models).

### EG4DCMSRC2-FQC-IS

Double Drum Attachment w/ Scale & Quick-Claw



### EG4DCM2-FQC-S

Double Drum Attachment w/ Scale & Quick-Claw



### EG4 CARRIAGE MOUNT

**MODELS** are designed to fit directly onto the Class II carriage of any lift truck or stacker. These models secure directly to the carriage and do not require a fork mounted frame. This model is known as **EG4DCM-CM**.



**ADJUSTABLE FRAMES** of the Eagle-Grip® 4 Attachments can be converted between EG4DCM-F and EG4DCM2-F by adding or removing an additional EG4DCM-CM.



**30-day free trial available for all EG4 models.**

**MAUSER HEADS FOR EAGLE-GRIP® 3 & 4 SERIES ATTACHMENTS:** The longer upper clamping jaw of the Mauser Clamp is designed for European-style plastic drums and are available for Eagle-Grip® 3 & 4 Series Attachments. Contact Easy Lift Equipment for more details.




## ATTACHMENT SAFETY RESTRAINT SYSTEMS

**ATTACHMENT SAFETY RESTRAINT SYSTEMS**, which are OSHA required, are included on all Eagle-Grip® Attachment models. Safety Restraint Systems may vary by model type & selected options. **Snap Hook Safety Chains** (seen below, left) come standard on all EG1, EG2L, EG4M8DC2-F, and EG2000RCR models. Safety chains are wrapped & secured to the lift truck's carriage prior to operating. **Cam Lock Safety Chains** come standard on all EG3, EG4, EL4F, and EPG models. The Cam Lock system (which does not require any tools) fastens directly to the lift truck's carriage prior to handling drums (as seen below, middle).

**Quick-Claw™ Safety Restraint System** eliminates the need for a safety chain altogether as well as prevents the operator from having to dismount and re-board the lift truck to connect and disconnect a safety chain during on-and-off usage. The cam locks of the Quick-Claw prevent the attachment from sliding off the forks, even when making abrupt stops with fully loaded drums. The unique rotating cams of the Quick-Claw bind to the heel of each fork when a load is lifted off the ground. The cams retract & release the attachment when contact with the ground is made again. This is an ideal feature when attachment usage is intermittent over time. Quick-Claw models come standard with 43-inch-long fork pockets (below, right).

**Snap Hook Safety Chain**

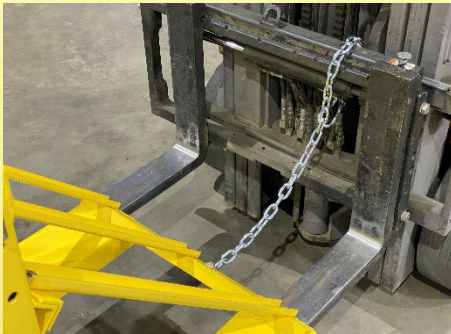

**Cam Lock Safety Chain**



**Quick-Claw™ Safety Restraint**



Unfortunately, over 90% of our customers do not use the standard safety chain assembly to secure the attachment to the lift truck. With the addition of the **Quick-Claw™ Safety Restraint System**, the attachment is secure the instant it leaves the ground. This method is compliant with all federal and state safety codes.

**Increases Productivity:** The Quick-Claw Safety Restraint System cuts down costs and improves productivity while the driver focuses on the task at hand without the additional fatigue that could be caused by having to dismount and re-board the lift truck to connect and disconnect a safety chain during on-and-off usage.

**Versatility and Reliability:** The Quick-Claw Safety Restraint System is built to and last guaranteed to work on any lift truck.

**Retrofit to Older Models:** The Quick-Claw Safety Restraint System can be added to older attachments. Contact Easy Lift Equipment for more details.

## PREVENTATIVE MAINTENANCE KITS

### PREVENTATIVE MAINTENANCE KITS:


Keep your Eagle-Grip® Attachments in top condition by stocking our preventative maintenance kits. Each P.M. Kit includes: all necessary replacement springs, pins, lubricating grease, and a belt (if applicable) as well as any other necessary hardware at discounted pricing. Kits are available for all Eagle-Grip® models. All two drum handling attachments require two P.M. Kits. (EG4 P.M. Kit shown). Contact Easy Lift Equipment for details on, or to order, any Eagle-Grip® Attachment P.M. Kits.



## EAGLE-GRIP® EMPTY DRUM HANDLING ATTACHMENT (EG4M8DC2-F)

**EG4M8DC2-F MAGNETIC EMPTY DRUM HANDLING ATTACHMENT** is designed to unload double, or triple stacked empty drums from trailers without the risk of injuries associated from lifting and lowering drums manually. The lift truck driver can energize the magnets to grip, lift, and move the drums by pressing the “ON” button of the remote control. A series of 16 total green LED lights (eight on top of the DC box and eight on the bottom) illuminate to let the operator know when the magnets are energized and will grip drums. Pressing the “OFF” button on the remote control again will de-energize the magnets (turning the LED lights off) and releasing the drums from the clamp. The 8 total magnets are housed in stainless-steel housings which swivel to grip mis-aligned drums. The magnets are powered by two 12-volt AGM deep cycle batteries which are housed in a closable cabinet along with a master disconnect switch, battery discharge indicator, internal battery charger, & DC converter. Finished in safety yellow powder coating for durability. This attachment is designed to handle 1A1 (closed top) and 1A2 (open top) style steel drums, which typically only contain 2 rolled hoops per drum. This product is **not** for use with 17H drums, which have 3 rolled hoops. Lift Trucks that are using the EG4M8DC2-F Attachment with the intent of unloading triple-stacked drums from a trailer cannot have a load back rest.

**EG4M8DC2-F gripping steel drums**

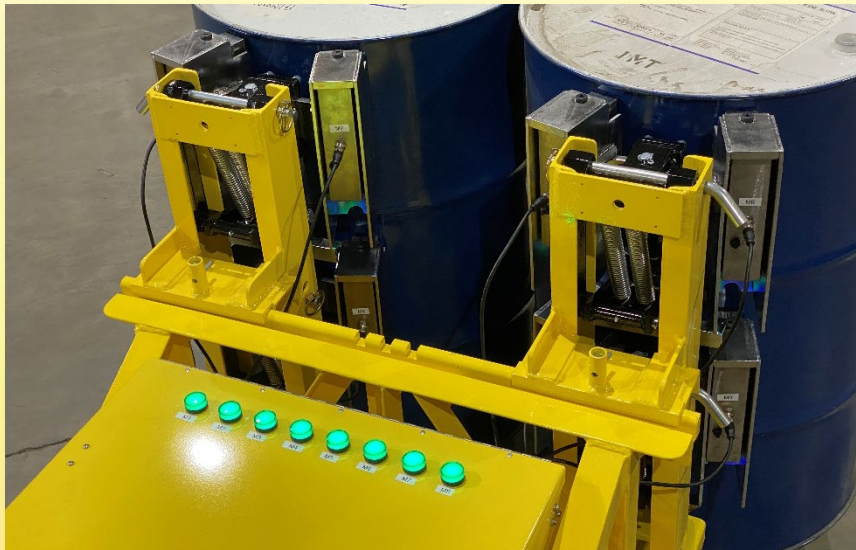

**EG4M8DC2-F showing 8 magnets**



**EG4M8DC2-F Remote Control**



**EG4M8DC2-F Placing Drums on Floor**



Click this link to see a video of this product: <https://youtu.be/OeT3ubj7KHc>

**We offer a 30-day trial toward purchase program for first time buyers at 15% of the purchase price.**


## **EAGLE-GRIP® POWERED DRUM DUMPER ATTACHMENT (EG2000RCR)**

**EAGLE-GRIP® EG2000RCR Powered Drum Dumper Lift Truck Attachments** are designed to handle a wide range of drum handling applications, including, clamping, lifting, transporting, and rotating drums. The EG2000RCR is a self-powered lift truck attachment which allows the operator to remotely manipulate drums from most lift trucks without the need for additional equipment or having to dismount the lift truck while clamping, lifting, and rotating a drum. This is achieved by using the magnetic backed remote-control box which is mounted in a convenient, easily accessible location within the lift trucks cab. This attachment offers the ability to clamp and rotate 18” to 28” (45.7 to 71.1 cm) diameter steel, plastic or fiber drums 360° endlessly either left or right. The maximum lifting capacity of the EG2000RCR is 2,000 lbs. (907.2 kgs), however the actual capacity and lift height may be limited by the specifications of your lift truck. The EG2000RCR has 38” (96.5 cm) long fork pockets, which are 33.25” (84.5 cm) wide. Each fork pocket is 7” (17.8 cm) wide with a 6.5” (16.5 cm) inside width. There is a 19.375” (49.21 cm) ID between the fork pockets.

**EG2000RCR**



**EG2000RCR magnetic backed remote control box mounted within the lift truck cab**

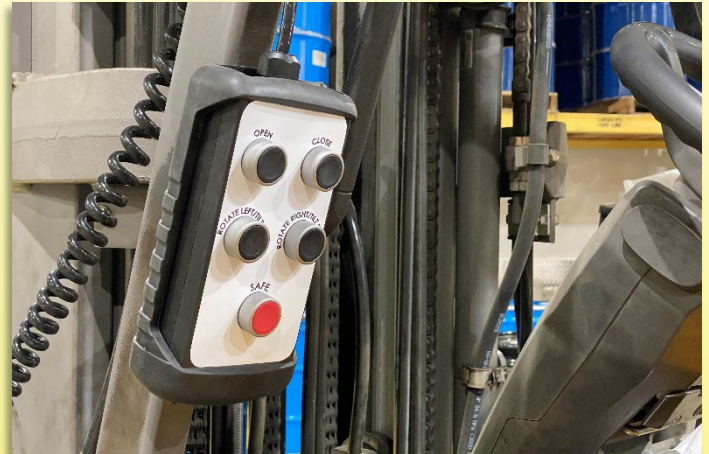

**Using the EG2000RCR Lift Truck Attachment to dump a steel drum into a tank**



**We offer a 30-day trial toward purchase program for first time buyers at 15% of the purchase price.**

## **EG2000RCR POWERED DRUM DUMPER ATTACH. (CONT.) (EG2000RCR-QC)**

**EAGLE-GRIP® EG2000RCR-QC Powered Drum Dumper Lift Truck Attachments with Quick-Claw.** The Quick-Claw option is also available for the EG2000RCR attachment, which eliminates the need for a safety chain. The cam locks of the Quick-Claw safety restraint system prevents the attachment from sliding off the forks, even when making abrupt stops with a fully loaded drum. This safety feature helps avoid accidents and work-related injuries. Powered Drum Dumper lift truck attachments with the optional Quick-Claw feature allows for easier detachment from the lift truck forks. Once the attachment is set down onto the floor, the Cams spin, releasing from the forks, allowing the operator to freely back out and remove the lift truck forks from the EG2000RCR fork pockets. The maximum lifting capacity of the EG2000RCR-QC is 2,000 lbs. (907.2 kgs), however the actual capacity and lift height may be limited by the specifications of your lift truck. The EG2000RCR-QC has 43” (109 cm) long fork pockets, which are 33.25” (84.5 cm) wide. Each fork pocket is 7” (17.8 cm) wide with a 6.5” (16.5 cm) inside width. There is a 19.375” (49.21 cm) ID between the fork pockets.

**EG2000RCR-QC**



**EG2000RCR-QC fork pockets and cam locks**



**Using the EG2000RCR-QC Lift Truck Attachment to dump a steel drum into a tank**



**We offer a 30-day trial toward purchase program for first time buyers at 15% of the purchase price.**

## EAGLE-GRIP® EL4 ATTACHMENTS

**EAGLE-GRIP® EL4F FOUR DRUM HANDLING ATTACHMENT** is designed for high-volume, heavy duty drum handling. The EL4F is all-mechanical and capable of handling one to four fully loaded 1,500 lb. steel, plastic, or fiber drums at a time (for an overall capacity of 6,000 lbs.) without the need for hydraulic or electrical connections to the lift truck. It's the ideal attachment for loading or unloading trailers, overseas shipping containers or for palletizing drums from filling lines. The EL4F consists of a floating head with a centering guide which helps properly position the clamping mechanism into place, while lowering the attachment between up to 4 drums. Once fully lowered, raising the attachment activates the EL4F Clamping mechanisms which securely grip the drums in place for transportation over dock plates and other unlevel surfaces.

**EL4F  
with Steel Drums**



**Close-up of EL4F  
with Plastic Drums**



**EL4F gripping and raising four  
full steel drums**



To release the drum(s), fully lower the drum or drums onto a pallet or floor. Then, elevate the EL4F center guide upward. This motion will disengage the clamping mechanisms from the chimes of the drum(s).

**EAGLE-GRIP® EL4F-SRC FOUR DRUM HANDLING ATTACHMENT.** The EL4F is also available with our **Spark Resistant Clamp** option (also known as SRC). The EL4F-SRC functions the same as the standard EL4F but is better suited for working with flammable materials in potentially hazardous environments. The SRC option includes the following stainless-steel components: outer housings, fins, center guides and back pads. As well as a spider with investment casted spark resistant alloy clamping jaws. The back pads are comprised of a stainless-steel plate, covered in white non-marking SBR rubber.

**EL4F-SRC over Steel Drums**



**EL4F-SRC close-up of clamps & back pads**




**30-day free trial available for EL4 models (excluding SRC option).**

## EAGLE-GRIP® EL4 ATTACHMENTS (CONT.)

**EAGLE-GRIP® EL4F & EL4F-SRC WITH QUICK-CLAW.** The Quick-Claw option is also available for EL4F models. Quick-Claw eliminates the need for a safety chain as well as prevents the operator from having to dismount and re-board the lift truck to connect and disconnect a safety chain during on-and-off usage. The Quick-Claw Safety Restraint System locks the attachment onto the lift trucks' forks as soon as the EL4F is lifted off the ground. This is an ideal feature when attachment usage is intermittent over time. The cam locks of the Quick-Claw prevent the attachment from sliding off the forks when making abrupt stops -- even when transporting fully loaded drums. This safety feature helps prevent accidents and work-related injuries.

**EL4FQC, featuring Quick-Claw**

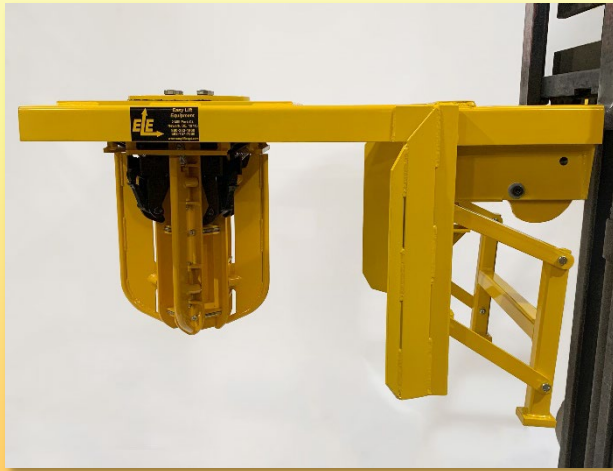

**EL4FQC-SRC, featuring Quick-Claw**



**EAGLE-GRIP® EL4C** underhook attachments are designed for crane and overhead hoist applications and utilize heavy duty automatic clamping mechanisms for handling up to four steel, plastic or fiber chimed drums weighting up to 1,500 lbs. each (for an overall capacity of 6,000 lbs.). Just as with the EL4F model, the EL4C is also available with the Spark Resistant Clamp (SRC) option. Care, use and inspection of EL4C models shall be done in accordance with ASME B30.20 and manufacturer's instructions.

**EL4C-SRC Crane Hoist**



**EL4C with Stand**



**EL4C-SRC raising four drums**



**30-day free trial available for EL4 models (excluding SRC option).**

# EAGLE-POLY (EPG) & EAGLE-TALON (ETG) ATTACHMENTS

**EAGLE-POLY GRIP (EPG) ATTACHMENTS.** European style plastic drums have steadily increased in numbers worldwide, especially among importers of fruit juices and other food products. Having a much larger lid or lifting chime, they are typically double stacked without pallets in overseas shipping containers and manhandled to be unloaded. The model EPG2-F can handle 1 or 2 of these containers at a time (of up to 800 lbs. per drum) using clamping arms which wrap around the tapered bottom sides of the drum(s). This attachment slides onto the forks of any lift truck. Its fully automatic mechanical design requires no electrical or hydraulic connections to the lift truck. A safety chain with cam lock secures the attachment to the lift truck carriage in seconds. An EPG1-F is also available for handling a single European-style drum at a time.

**EPG2-F**



**EPG2-F handling two drums**



**Close-up of EPG2-F clamping arms**



**EPG1-F for handling one drum**



## EAGLE-TALON GRIP (ETG) ATTACHMENTS.

The ETG1 model is an under-hook attachment used for lifting & transporting all types of chimed steel, plastic & fiber drums, weighing up to 1,500 lbs.. The positive mechanism of the ETG1 is completely mechanical and requires no electrical connections to the hoist or crane. An adjustable sliding counterweight can be preset to keep drums vertical. An optional protective belt supports the side of the drum which helps prevent any cosmetic abrasions to the drum. Special models are available to lift two drums at a time.

**ETG1 w/ Fiber Drum**



**ETG1 w/ Steel Drum**



**EASY LIFT EQUIPMENT., INC. IS AN ISO 9001: 2015 CERTIFIED COMPANY**



Easy Lift Equipment, Inc.  
 2 Mill Park Ct.  
 Newark, DE. 19713  
 800-233-1800  
 or 302-737-7000  
 Fax: 302-737-7333  
 Email: [sales@easylifteqpt.com](mailto:sales@easylifteqpt.com)  
[www.easylifteqpt.com](http://www.easylifteqpt.com)



**ISO 9001: 2015  
 Certified Company**

**30-day free trial available for all EPG and ETG models.**

## **EAGLE-GRIP® ATTACHMENT SPECIFICATIONS**

### **EAGLE-GRIP® 1 SERIES (Light Duty - Single Clamping Mechanism)**

<b>Model</b>	<b>Capacity (lbs/kg)</b>	<b>Weight (lbs/kg)</b>	<b>Height x Length x Width (inches)</b>	<b>Height x Length x Width (mm)</b>	<b>Drums Handled</b>	<b>Attachment Mounting</b>
EG1SCM-CM	750/340	49/23	32 x 14 x 14	813 x 356 x 356	1	Carriage Mount
EG1SCM-F	750/340	123/56	36 x 34 x 31	889 x 864 x 787	1	Fork Mount
EG1SCM-FQC	750/340	244/111	41 x 47 x 31	1016 x 1194 x 787	1	Fork Mount
EG1SCM2-F	1500/680	175/80	36 x 34 x 38	889 x 864 x 965	1 or 2	Fork Mount
EG1SCM2-FQC	1500/680	296/134	41 x 47 x 38	1016 x 1194 x 965	1 or 2	Fork Mount

### **EAGLE-GRIP® 2L SERIES (Light Duty - Double Clamping Mechanism)**

<b>Model</b>	<b>Capacity (lbs/kg)</b>	<b>Weight (lbs/kg)</b>	<b>Height x Length x Width (inches)</b>	<b>Height x Length x Width (mm)</b>	<b>Drums Handled</b>	<b>Attachment Mounting</b>
EG2LDCM-CM	1000/454	66/30	32 x 14 x 14	813 x 356 x 356	1	Carriage Mount
EG2LDCM-F	1000/454	140/64	36 x 35 x 31	940 x 889 x 787	1	Fork Mount
EG2LDCM-FQC	1000/454	261/119	41 x 47 x 31	1016 x 1194 x 787	1	Fork Mount
EG2LDCM2-F	1500/680	200/91	36 x 35 x 38	940 x 889 x 965	1 or 2	Fork Mount
EG2LDCM2-FQC	1500/680	296/134	41 x 47 x 38	1016 x 1194 x 965	1 or 2	Fork Mount

### **EAGLE-GRIP® 3 SERIES (Heavy Duty - Single Clamping Mechanism)**

<b>Model</b>	<b>Capacity (lbs/kg)</b>	<b>Weight (lbs/kg)</b>	<b>Height x Length x Width (inches)</b>	<b>Height x Length x Width (mm)</b>	<b>Drums Handled</b>	<b>Attachment Mounting</b>
EG3SCM-CM	1500/680	85/39	33 x 15 x 18	838 x 381 x 457	1	Carriage Mount
EG3SCM-NF	1500/680	228/104	36 x 47 x 24-1/2	914 x 1194 x 622	1	Narrow Fork Mount
EG3SCM-NFQC	1500/680	316/143	41 x 47 x 24-1/2	1041 x 1194 x 622	1	Narrow Fork Mount
EG3SCM-F	1500/680	306/139	36 x 47 x 33	914 x 1194 x 838	1	Fork Mount
EG3SCM-FQC	1500/680	394/179	41 x 47 x 33	1041 x 1194 x 838	1	Fork Mount
EG3SCM2-F	3000/1361	382/173	36 x 47 x 40-1/2	914 x 1194 x 1029	1 or 2	Fork Mount
EG3SCM2-FQC	3000/1361	470/213	42 x 47 x 41	1067 x 1194 x 1042	1 or 2	Fork Mount
EG3SCM4-F	6000/2722	748/340	30 x 47 x 86	762 x 1194 x 2165	1,2,3 or 4	Fork Mount
EG3SCM4-FQC	6000/2722	836/380	35 x 47 x 86	889 x 1194 x 2165	1,2,3 or 4	Fork Mount

### **EAGLE-GRIP® 4 SERIES (Heavy Duty - Double Clamping Mechanism)**

<b>Model</b>	<b>Capacity (lbs/kg)</b>	<b>Weight (lbs/kg)</b>	<b>Height x Length x Width (inches)</b>	<b>Height x Length x Width (mm)</b>	<b>Drums Handled</b>	<b>Attachment Mounting</b>
EG4DCM-CM	2000/907	110/50	33 x 15 x 18	838 x 381 x 457	1	Carriage Mount
EG4DCM-NF	2000/907	253/115	37 x 47 x 24	940 x 1194 x 610	1	Narrow Fork Mount
EG4DCM-NFQC	2000/907	341/155	42 x 47 x 24	1067 x 1194 x 610	1	Narrow Fork Mount
EG4DCM-F	2000/907	330/150	36 x 47 x 33	914 x 1194 x 838	1	Fork Mount
EG4DCM-FQC	2000/907	418/190	41 x 47 x 33	1041 x 1194 x 838	1	Fork Mount
EG4DCM2-F	4000/1815	432/196	36 x 47 x 41	914 x 1194 x 1042	1 or 2	Fork Mount
EG4DCM2-FQC	4000/1815	520/236	41 x 47 x 41	1041 x 1194 x 1042	1 or 2	Fork Mount
EG4DCM4-F	6000/2722	844/383	30 x 47 x 86	762 x 1194 x 2165	1,2,3 or 4	Fork Mount
EG4DCM4-FQC	6000/2722	932/380	35 x 47 x 86	889 x 1194 x 2165	1,2,3 or 4	Fork Mount

## **EAGLE-GRIP® ATTACHMENT SPECIFICATIONS (CONT.)**

### **EAGLE-GRIP® 4 SERIES EMPTY DRUM HANDLING ATTACHMENT**

Model	Capacity (lbs/kg)	Weight (lbs/kg)	Height x Length x Width (inches)	Height x Length x Width (mm)	Drums Handled	Attachment Mounting
-------	----------------------	--------------------	-------------------------------------	---------------------------------	------------------	------------------------

EG4M8DC2-F	200 / 90.7	700/317.5	31 x 48 x 36	787 x 1219 x 914	1 or 2	Fork Mount
------------	------------	-----------	--------------	------------------	--------	------------

### **EAGLE POLY-GRIP ATTACHMENT (For handling European open head plastic drums)**

Model	Capacity (lbs/kg)	Weight (lbs/kg)	Height x Length x Width (inches)	Height x Length x Width (mm)	Drums Handled	Attachment Mounting
-------	----------------------	--------------------	-------------------------------------	---------------------------------	------------------	------------------------

EPG1-F	800/363	171/78	22 x 52 x 27	559 x 1321 x 686	1	Fork Mount
--------	---------	--------	--------------	------------------	---	------------

EPG2-F	1600/725	252/114	22 x 52 x 52	559 x 1321 x 1321	1	Fork Mount
--------	----------	---------	--------------	-------------------	---	------------

### **EAGLE TALON-GRIP ATTACHMENT**

Model	Capacity (lbs/kg)	Weight (lbs/kg)	Height x Length x Width (inches)	Height x Length x Width (mm)	Drums Handled	Attachment Mounting
-------	----------------------	--------------------	-------------------------------------	---------------------------------	------------------	------------------------

ETG1	1500/680	75/34	27 x 24 x 14	838 x 381 x 457	1	Hoist Mount
------	----------	-------	--------------	-----------------	---	-------------

### **EAGLE-GRIP® FOUR DRUM HANDLING ATTACHMENTS**

Model	Capacity (lbs/kg)	Weight (lbs/kg)	Height x Length x Width (inches)	Height x Length x Width (mm)	Drums Handled	Attachment Mounting
-------	----------------------	--------------------	-------------------------------------	---------------------------------	------------------	------------------------

EL4F	8000/3630	552/252	26 x 38 x 44	660 x 965 x 1105	1,2,3 or 4	Fork Mount
------	-----------	---------	--------------	------------------	------------	------------

EL4F-SRC	8000/3630	575/261	26 x 38 x 44	660 x 965 x 1105	1,2,3 or 4	Fork Mount
----------	-----------	---------	--------------	------------------	------------	------------

EL4FQC	8000/3630	648/293	27 x 51 x 45	838 x 1283 x 1143	1,2,3 or 4	Fork Mount
--------	-----------	---------	--------------	-------------------	------------	------------

EL4FQC-SRC	8000/3630	665/302	27 x 51 x 45	838 x 1283 x 1143	1,2,3 or 4	Fork Mount
------------	-----------	---------	--------------	-------------------	------------	------------

EL4C	8000/3630	474/217	33 x 27 x 27	838 x 673 x 673	1,2,3 or 4	Hoist Mount
------	-----------	---------	--------------	-----------------	------------	-------------

EL4C-SRC	8000/3630	575/261	33 x 27 x 27	838 x 673 x 673	1,2,3 or 4	Hoist Mount
----------	-----------	---------	--------------	-----------------	------------	-------------

**Note:** Eagle-Grip® Series 1, 2, 3 & 4 attachments equipped with scales will have a slight increase in length and weight. Consult factory for correct specifications.

All Eagle-Grip® attachments are available for a free 30-day trial for in-plant evaluation. The trial program is only available in North America. The customer is responsible for all freight charges (and duties if applicable) to and from the trial location.

**A 30-day free trial is available for all Eagle-Grip® Attachments, except for the following:**

**EG4M8DC2-F attachment, EG2000RCR models and EL4SRC models, which offer a 30-day trial toward purchase program for first time buyers at 15% of the purchase price.**



Easy Lift Equipment, Inc.  
2 Mill Park Ct.  
Newark, DE. 19713  
800-233-1800  
or 302-737-7000  
Fax: 302-737-7333  
Email: [sales@easylifteqpt.com](mailto:sales@easylifteqpt.com)  
[www.easylifteqpt.com](http://www.easylifteqpt.com)

**EASY LIFT EQUIPMENT., INC. IS AN  
ISO 9001: 2015 CERTIFIED COMPANY**



**ISO 9001: 2015  
Certified Company**